

EVALUATING THE EFFECT OF HUMIDITY AND ACIDITY ON THE OPTICAL CHARACTERISTIC OF A SOIL SAMPLE

Imre T. Tolner¹, Kornél D. Szalay², Ádám Csorba³, László Tolner³, József Deákvári⁴,
Gábor Milics¹, László Fenyvesi⁴, Miklós Neményi¹

¹University of West Hungary Faculty of Agricultural and Food Science; Hungary
e-mail: tolner.imre@mtk.nyime.hu

²Hungarian Institute of Agricultural Engineering, Outer Agricultural Technical
Department of Szent István University, Tessedik Sámuel u. 4., Gödöllő, Hungary,

³Szent István University, Department of Soil Science and Agrochemistry, Gödöllő,
Hungary

⁴Hungarian Institute of Agricultural Engineering, Tessedik Sámuel street 4., Gödöllő ,
Hungary

Abstract

Diagnosing soil parameters is important part of agriculture, environment protection, and geology too. Compared to the hyperspectral remote sensing, the conventional methods makes possible to evaluate the topsoil of large areas in fast and economic way. The ASD spectroraimeter of the Hungarian Institute of Agricultural Engineering is capable of gathering spectral information in the wavelength from 350 to 2500 nm. The spectral information referring to soils are usually studied in the upper range of this interval. Detection of soil acidity with remote sensing is not easy because practically we can only analyse the indirect effects of the pH change by measuring the characteristic of the reflected light from the surface of the soil. As a result of the chemical reaction during the pH change new formation of molecules, molecule parts and ions are modifying the reflection parameters of the soil and this alteration can be measured. Through these changing factors we can conclude to the level of the soil acidity. In the following experiment we are examining the reflectance spectrum of one soil sample in laboratory. In order to make various pH levels the soil samples were treated differently with hydrochloric acid. As a result of the treatment the spectrums had modified. The spectral interval referring to the OH group showed significant dislocation. Eliminate the confounding effects of water we used usually completely dried samples in laboratory. In this project, we also examined the samples on air-dried state. In this case the samples contain water, balanced air humidity.

Keywords: hyperspectral technology, soil acidity, humidity

Intoduction

Finding diagnostic soil parameters is equally important in geology, agricultural and environmental sciences. The hyperspectral remote sensing technology makes possible to evaluate the topsoil of large areas in a fast and economic way as compared to the conventional methods. The airborne hyperspectral imaging sensor AISA DUAL and the ASD FieldSpec®3 Max portable field spectroradiometer operated in the Institute of Agricultural Engineering are capable of gathering spectral information in the wavelength range of 350nm to 2500 nm. The spectral information referring to soils specific to the mineral composition are to be found usually in the upper range of this interval (Kardeván 2000, 2007). Detection of soil acidity with spectral remote sensing is not easy, because

indirect effects of the pH changes can only be analysed by measuring the reflectance spectra from the surface of the soil. The experiments of Bruno (2007) proved that the quantitative changes of OH group concentration cause changes in reflectance spectra, which can be measured. The quantity of the OH group is correlating with the amount of the acid groups of the soil, as well. The samples with different pH value were produced with varying hydrochloric acid treatment of the soil samples. In the course of the experiment, a change in the water absorbing ability of the soil was observed. The water content of the samples strongly influenced the reflection (Neményi 2008, Milics 2004). Therefore, we especially paid attention to the desiccation of the examined samples. In the experiment described below, we have analysed in laboratory the reflectance spectra of different pH values of the same soil sample.

Material and methods

The soil samples were collected from the test area Kiszombor, of the Cereal Research Non-Profit Ltd, Szeged. During the sampling process, the soil was covered with wheat varieties, therefore field evaluation of the soil spectra was not carried out. The samples were grinded, dried and sifted to a grain size of 2 mm. Different pH values were produced by various acid treatments by mixing smoothly 100 g soil with 100 cm³ hydrochloric acid, than dried them at 105 °C. The samples were cooled down and stored until the measuring in desiccator. The spectral measurement was carried out on dry samples. Referring to 100 g soil, the acid treatments with parameters of 0, 20, 40, 100 mmol were used. The spectra were recorded in a closed laboratory space, in which external light sources were excluded. The specially covered internal walls of the closed space showed an overall reflectance factor of 0.02 (from 350nm up to 2500 nm)). With proper geometrical arrangement, minimization of the unwanted environmental effect could be achieved. Though the dust, the heat of the illumination source and the water absorption of the soil are present, they can be considered as constant factors during measurements. The experimental arrangement is presented in Figure 1.



Figure 1. Experimental arrangement: left side the target tray, above the sensor and right side the light source.

Each soil samples were measured in four positions by rotating them with 90 degrees (0, 90, 180, 270). Soil sample measurements covered 10 individual spectral sampling each being composed of 50 scans. The reflectance factors were calculated from the ratio of reflected radiance from the soil samples to the ones of a white reference panel.

Results and discussion

The reflectance spectra of the soil samples measured in 4 positions. Further we used these averages. At first we analysed the dry samples. In Fig 2, the effect of changes in reflectance spectra resulted from the various (0, 20, 40 and the 100 mmol) acid treatments are shown.

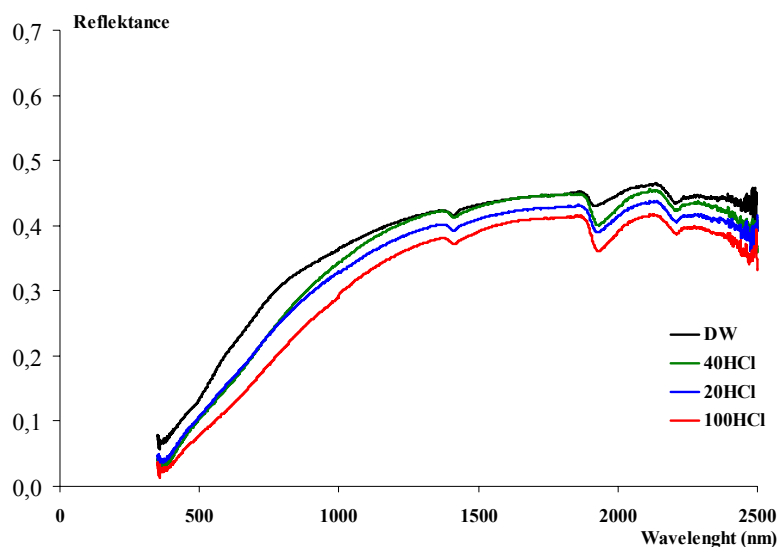


Figure 2. Means of the recorded reflectance curves resulted by various hydrochloric acid treatments on dry samples. (The upper curve represents the Distilled Water , while lower represents 100 mmol acid treatments)

The highest reflectance curve was recorded at the control treatment of distilled water, while the others were resulted spectrums with different off-sets. At first sight, there is no correlation between the treatments and the reflectance spectras. The analyses of the difference values between the acid treated sample spectra and the control spectrum (treated with distilled water) showed, however, that a certain segments of the spectrum is very informative (Figure 3.).

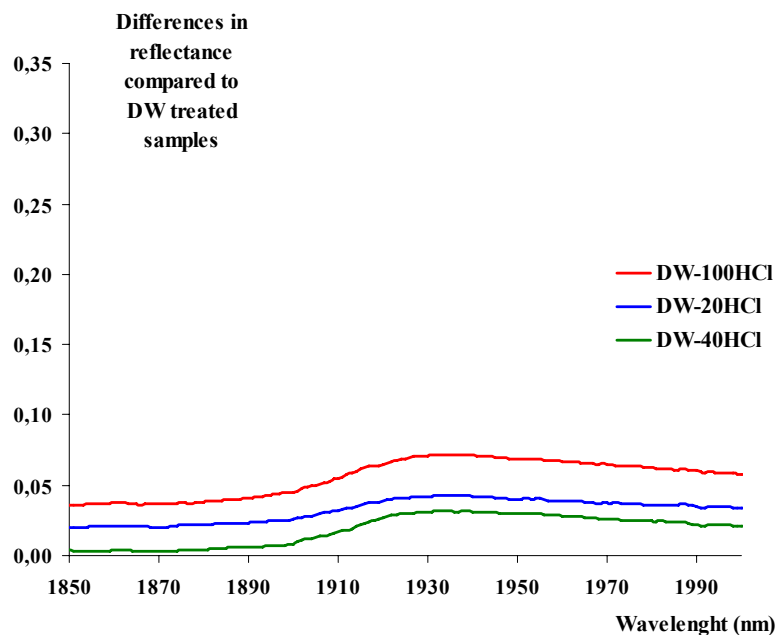


Figure 3. The informative segment of difference spectrums regarding the control treatment's spectrum on dry samples.

The wave-like variation of the difference curve is representative to the acid treatment. By evaluating the differences in the wavelength range between 1900 and 1930 we found non linear correlation with the levels of treatments (Figure 6.).

After that we analysed the wet samples. In Fig 4, the effect of changes in reflectance spectra resulted from the various (0, 20, 40 and the 100 mmol) acid treatments are shown.

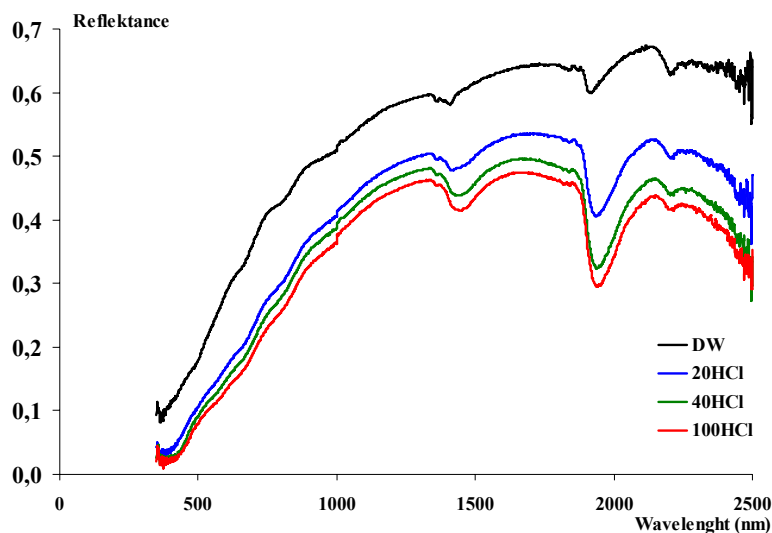


Figure 4. Means of the recorded reflectance curves resulted by various hydrochloric acid treatments on wet samples. (The upper curve represents the Distilled Water , while lower represents 100 mmol acid treatments)

In the cases of the wet samples also the highest reflectance curve was recorded at the control treatment of distilled water, while the others were resulted spectrums with different off-sets. At first sight, there is no correlation between the treatments and the reflectance spectras. The analyses of the difference values between the acid treated sample spectra and the control spectrum (treated with distilled water) showed, however, that a certain segments of the spectrum is very informative (Figure 5.).

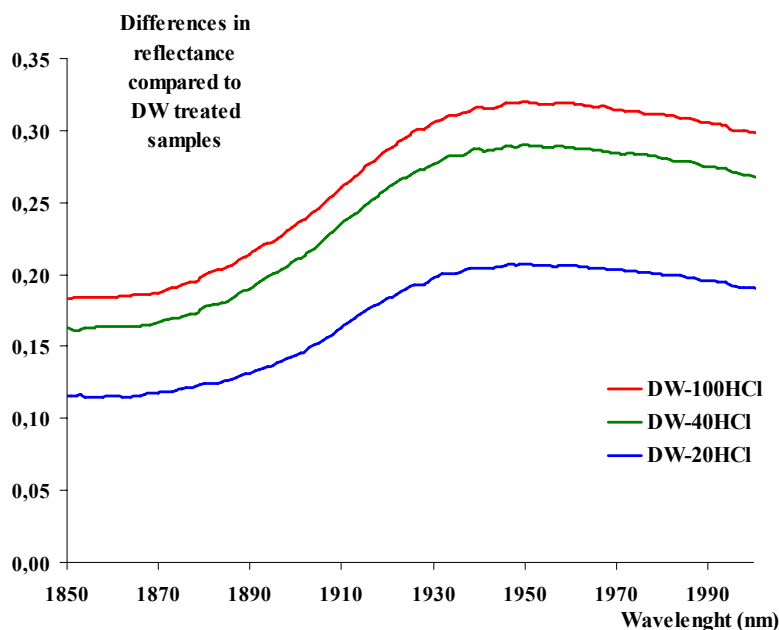


Figure 5. The informative segment of difference spectrums regarding the control treatment's spectrum on wet samples.

The wave-like variation of the difference curve is representative to the acid treatment. By evaluating the differences in the wavelength range between 1900 and 1930 nm we found non linear correlation with the levels of treatments (Figure 6.) too.

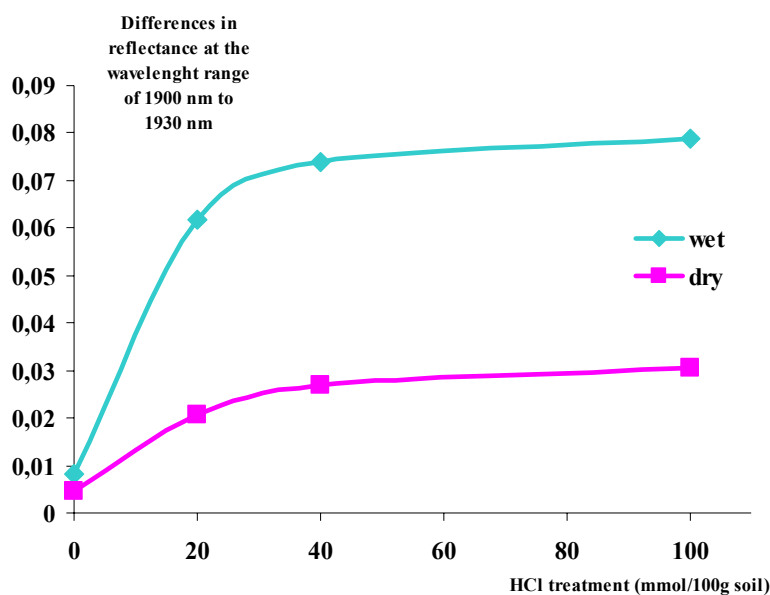


Figure 6. Correlation between the treatments and the reflectance spectrums 1900 and 1930 nm on dry and wet samples.

Conclusions

As a conclusion it can be stated that in laboratory environment, working with dry soil samples suitable wavelengths can be chosen at which the reflectance factor differences of the treated soil sample's compared to the ones with control (distilled water) treatment are correlating well with the rate of the hydrochloric acid treatment

References

- Kardeván P. - Róth L. - Vekerdy Z. (2000): Terepi spektroradiométeres mérések a 2000. márciusi, bányászati tevékenység okozta tiszai nehézfém szennyeződések hatásának vizsgálatára. Földtani kutatás, 2000. IV.
- P. Kardeván (2007): Reflectance Spectroradiometry – A New Tool For Environmental Mapping, Carpath. J. of Earth and Environmental Sciences, Vol. 2, No. 2, p. 29 – 38 www.ubm.ro/sites/CJEES/upload/2007_2/Kardevan.pdf
- Nemenyi M.; Milics G.; Mesterházi P. Á. (2008): The role of the frequency of soil parameter database collection with special regard to on-line soil compaction measurement. In: Andrea Formato: Advance in Soil & Tillage Research. pp. 125-140. ISBN 978-81-7895-353-3
- Milics G.- Nagy V. – Štekauerová V. (2004): GIS applications for groundwater and soil moisture data presentations. - 12. Posterový deň s medzinárodnou účasťou a Deň otvorených dverí na UH SAV. Transport vody, chemikálií a energie v systéme pôda-rastlina-atmosféra, 25. november 2004, Ústav hydrológie SAV, Račianska 75, Bratislava, Slovenská Republika, Konferenčné CD, ISBN 80-89139-05-1
- Bruno Seilera, Mathias Kneubühler, Bettina Wolframmb, Klaus I. Ittena - Quantitative Assessment Of Soil Parameters In Western Tajikistan Using A Soil Spectral Library Approach - 10th International Symposium on Physical Measurements and Signatures in Remote Sensing (ISPMRS'07) Davos, Switzerland 12 – 14 March 2007.